


LANSING CSO CONTROL PROGRAM PRIVATE PROPERTY WORK

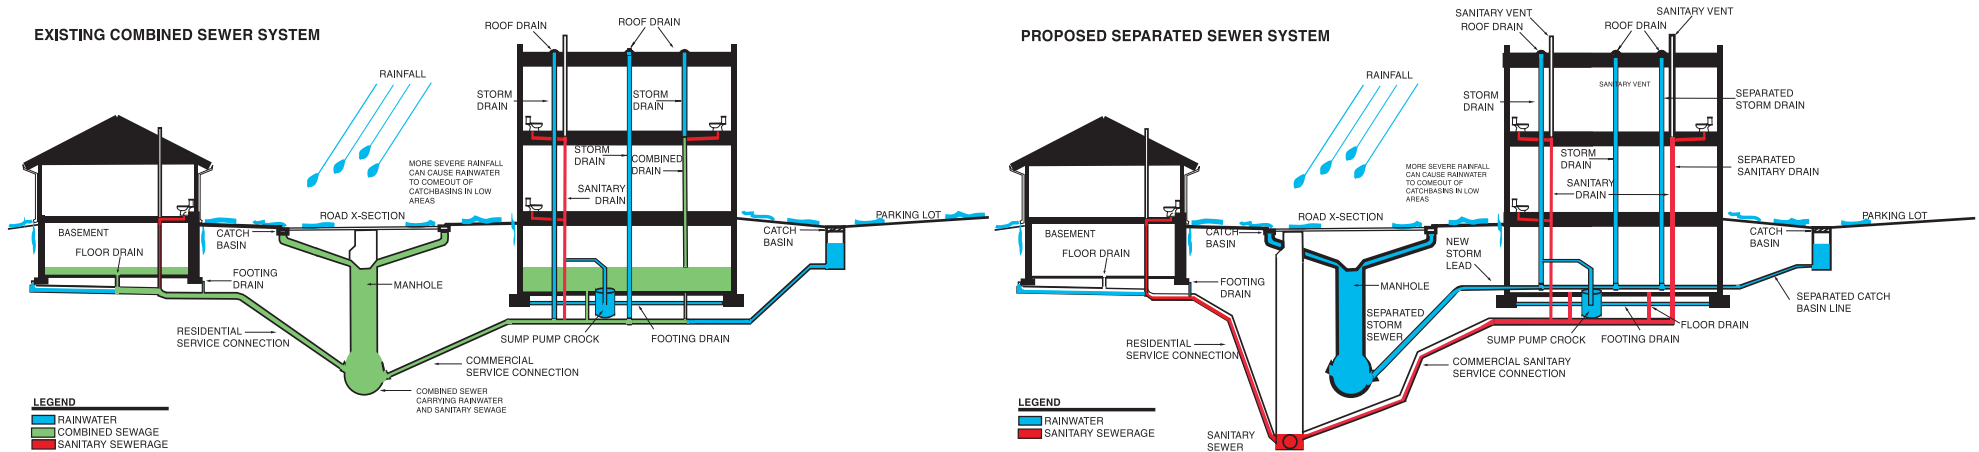

STEPS PROPERTY OWNER NEEDS TO TAKE

- 1. Retain engineer and/or plumbing contractor to investigate property and determine the sewer separation needs to separate the sanitary and storm flows from your property into two separate systems.**
- 2. Complete separation of sanitary and storm flows:**
 - **Disconnect roof drains from sanitary; redirect to storm sewer.**
 - **Disconnect parking lot catch basins and ground level storm water sewers from sanitary; redirect to storm sewer.**
 - **Redirect sump pump footing drain flow onto ground or into a storm sewer.**
- 3. Property owner is responsible for costs associated with private property sewer separation work performed on private property.**